


120 kHz Bandwidth, High-Voltage Isolation Current Sensor with Integrated Overcurrent Detection

Features and Benefits

- Industry-leading noise performance with greatly improved bandwidth through proprietary amplifier and filter design techniques
- Small footprint package suitable for space-constrained applications
- 1 mΩ primary conductor resistance for low power loss
- High isolation voltage, suitable for line-powered applications
- User-adjustable Overcurrent Fault level
- Overcurrent Fault signal typically responds to an overcurrent condition in < 2 μs
- Integrated shield virtually eliminates capacitive coupling from current conductor to die due to high dV/dt voltage transients
- Filter pin capacitor improves resolution in low bandwidth applications
- 3 to 5.5 V single supply operation
- Factory-trimmed sensitivity and quiescent output voltage
- Chopper stabilization results in extremely stable quiescent output voltage
- Ratiometric output from supply voltage



Package: 16-Pin SOIC Hall-Effect IC Package (suffix LA)

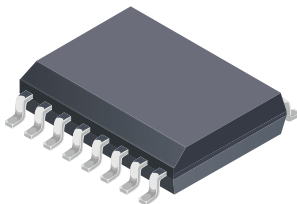

Not to scale

Description

The Allegro™ ACS710 current sensor provides economical and precise means for current sensing applications in industrial, commercial, and communications systems. The device is offered in a small footprint surface-mount package that allows easy implementation in customer applications.

The ACS710 consists of a precision linear Hall sensor integrated circuit with a copper conduction path located near the surface of the silicon die. Applied current flows through the copper conduction path, and the analog output voltage from the Hall sensor linearly tracks the magnetic field generated by the applied current. The accuracy of the ACS710 is maximized with this patented packaging configuration because the Hall element is situated in extremely close proximity to the current to be measured.


High-level immunity to current conductor dV/dt and stray electric fields, offered by Allegro proprietary integrated shield technology, results in low ripple on the output and low offset drift in high-side, high-voltage applications.

The voltage on the Overcurrent Input (VOC pin) allows customers to define an overcurrent fault threshold for the device. When the current flowing through the copper conduction path (between the IP+ and IP- pins) exceeds this threshold, the open drain Overcurrent Fault pin will transition to a logic low state. Factory programming of the linear Hall sensor inside of the ACS710 results in exceptional accuracy in both analog and digital output signals.

The internal resistance of the copper path used for current sensing is typically 1 mΩ, for low power loss. Also, the current conduction path is electrically isolated from the low-voltage

Continued on the next page...

Typical Application Circuit

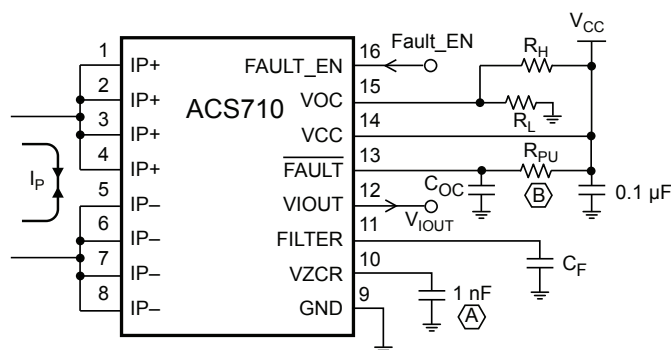

| | |
|------------|---|
| R_H, R_L | Sets resistor divider reference for V_{OC} |
| C_F | Noise and bandwidth limiting filter capacitor |
| C_{OC} | Fault delay setting capacitor, 22 nF maximum |
| (A) | Use of capacitor required |
| (B) | Use of resistor optional, 330 kΩ recommended. If used, resistor must be connected between \overline{FAULT} pin and V_{CC} . |

Description (continued)

sensor inputs and outputs. This allows the ACS710 family of sensors to be used in applications requiring electrical isolation, without the use of opto-isolators or other costly isolation techniques.

The ACS710 is provided in a small, surface-mount SOIC16 package. The leadframe is plated with 100% matte tin, which is compatible with standard lead (Pb) free printed circuit board assembly processes. Internally, the device is Pb-free, except for flip-chip high-temperature

Pb-based solder balls, currently exempt from RoHS. The device is fully calibrated prior to shipment from the factory.

Applications include:

- Motor control and protection
- Load management and overcurrent detection
- Power conversion and battery monitoring / UPS systems

Selection Guide

| Part Number | I_P (A) | Sens (typ) at $V_{CC} = 5\text{ V}$ (mV/A) | Latched Fault | T_A (°C) | Packing ¹ |
|-------------------------------------|--------------|--|------------------|---------------|-------------------------------------|
| ACS710KLATR-6BB-T ^{2,3} | ±6 | 151 | Yes | -40 to 125 | Tape and Reel, 1000 pieces per reel |
| ACS710KLATR-10BB-T ² | ±10 | 85 | | | |
| ACS710KLATR-12CB-T ² | ±12.5 | 56 | | | |
| ACS710KLATR-25CB-T ² | ±25 | 28 | | | |
| ACS710KLATR-6BB-NL-T ^{2,3} | ±6 | 151 | No | -40 to 125 | Tape and Reel, 1000 pieces per reel |
| ACS710KLATR-10BB-NL-T ² | ±10 | 85 | | | |
| ACS710KLATR-12CB-NL-T ² | ±12.5 | 56 | | | |
| ACS710KLATR-25CB-NL-T ² | ±25 | 28 | | | |

¹ Contact Allegro for packing options.

² Variant not intended for automotive applications.

³ The formerly offered $V_{CC} = 3.3\text{ V}$ version of the $I_P = \pm 6\text{ A}$ variant (formerly the ACS710KLATR-6BB-T) is now offered as the ACS716KLATR-6BB-T. For additional information, please refer to the ACS716 datasheet.

Absolute Maximum Ratings

| Characteristic | Symbol | Notes | Rating | Unit |
|--|------------------------|---|------------|------|
| Supply Voltage | V_{CC} | | 8 | V |
| Filter Pin | V_{FILTER} | | 8 | V |
| Analog Output Pin | V_{IOUT} | | 32 | V |
| Overcurrent Input Pin | V_{OC} | | 8 | V |
| Overcurrent \overline{FAULT} Pin | $V_{\overline{FAULT}}$ | | 8 | V |
| Fault Enable (FAULT_EN) Pin | $V_{FAULTEN}$ | | 8 | V |
| Voltage Reference Output Pin | V_{ZCR} | | 8 | V |
| DC Reverse Voltage: VCC, FILTER, VIOUT, VOC, \overline{FAULT} , FAULT_EN, and VZCR Pins | V_{Rdcx} | | -0.5 | V |
| Excess to Supply Voltage: FILTER, VIOUT, VOC, \overline{FAULT} , FAULT_EN, and VZCR Pins | V_{EX} | Voltage by which pin voltage can exceed the VCC pin voltage | 0.3 | V |
| Output Current Source | $I_{IOUT(SOURCE)}$ | | 3 | mA |
| Output Current Sink | $I_{IOUT(SINK)}$ | | 1 | mA |
| Operating Ambient Temperature | T_A | Range K | -40 to 125 | °C |
| Junction Temperature | $T_J(max)$ | | 165 | °C |
| Storage Temperature | T_{stg} | | -65 to 170 | °C |

Isolation Characteristics


| Characteristic | Symbol | Notes | Rating | Unit |
|-------------------------------------|------------|--|--------|-----------------|
| Dielectric Strength Test Voltage* | V_{ISO} | Agency type-tested for 60 seconds per IEC/UL 60950-1 (2nd Edition). | 3600 | V_{RMS} |
| | | Agency type-tested for 60 seconds per UL 1577. | 3000 | V_{RMS} |
| Working Voltage for Basic Isolation | V_{WVBI} | Maximum approved working voltage for basic (single) isolation according to IEC/UL 60950-1 (2nd Edition). | 870 | V_{PK} or VDC |
| | | | 616 | V_{RMS} |
| Clearance | D_{CL} | Minimum distance through air from IP leads to signal leads. | 7.5 | mm |
| Creepage | D_{CR} | Minimum distance along package body from IP leads to signal leads. | 7.5 | mm |

*Production tested for 1 second at 3600 V_{RMS} in accordance with both UL 1577 and IEC/UL 60950-1 (edition 2).

Thermal Characteristics

| Characteristic | Symbol | Test Conditions | Value | Unit |
|----------------------------|-----------------|--|-------|------|
| Package Thermal Resistance | $R_{\theta JA}$ | When mounted on Allegro demo board with 1332 mm ² (654 mm ² on component side and 678 mm ² on opposite side) of 2 oz. copper connected to the primary leadframe and with thermal vias connecting the copper layers. Performance is based on current flowing through the primary leadframe and includes the power consumed by the PCB. | 17 | °C/W |


Functional Block Diagram Latching Version

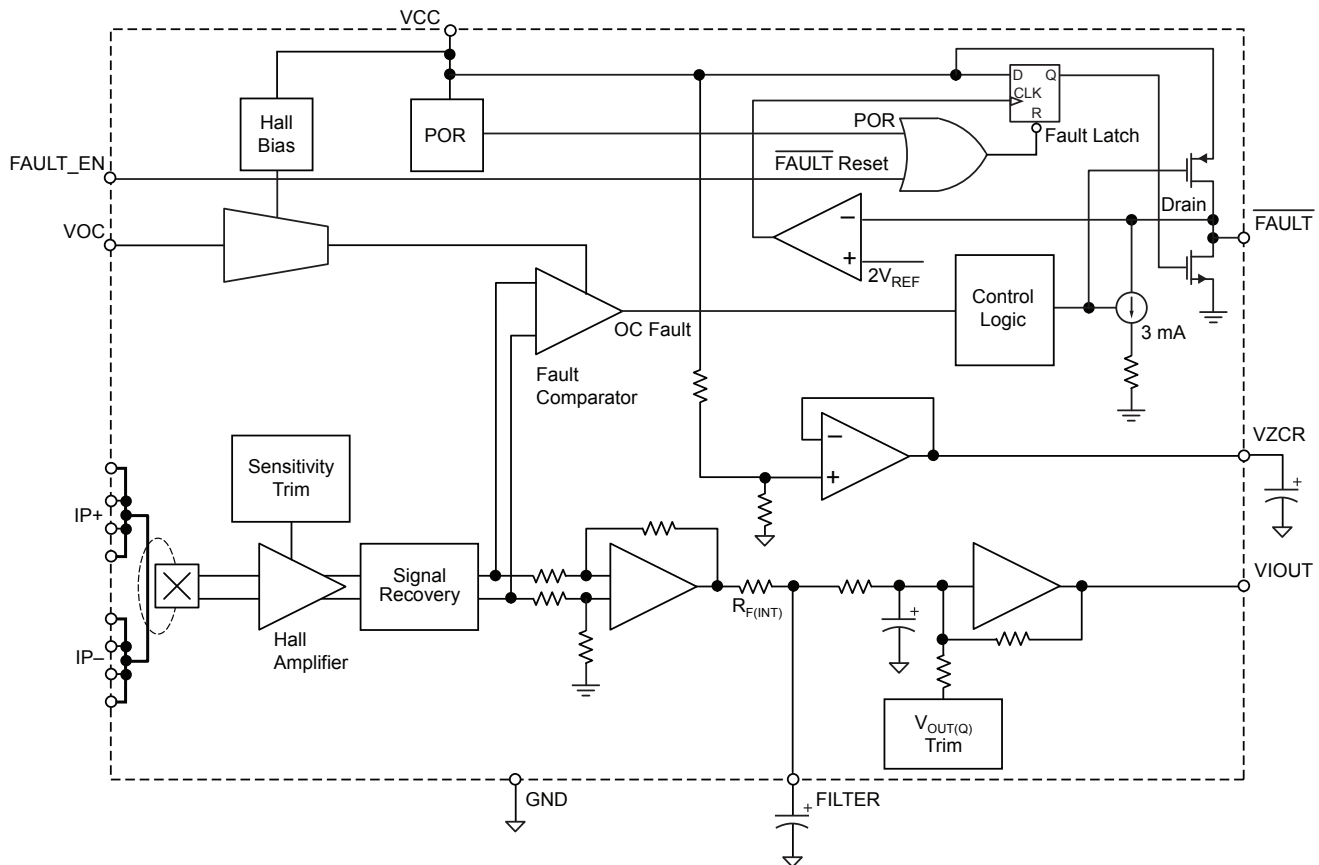


Terminal List Table, Latching Version

| Number | Name | Description |
|---------|----------|---|
| 1,2,3,4 | IP+ | Sensed current copper conduction path pins. Terminals for current being sensed; fused internally, loop to IP- pins; unidirectional or bidirectional current flow. |
| 5,6,7,8 | IP- | Sensed current copper conduction path pins. Terminals for current being sensed; fused internally, loop to IP+ pins; unidirectional or bidirectional current flow. |
| 9 | GND | Device ground connection. |
| 10 | VZCR | Voltage Reference Output pin. Zero current (0 A) reference; output voltage on this pin scales with V _{CC} . (Not a highly accurate reference.) |
| 11 | FILTER | Filter pin. Terminal for an external capacitor connected from this pin to GND to set the device bandwidth. |
| 12 | VIOUT | Analog Output pin. Output voltage on this pin is proportional to current flowing through the loop between the IP+ pins and IP- pins. |
| 13 | FAULT | Overcurrent Fault pin. When current flowing between IP+ pins and IP- pins exceeds the overcurrent fault threshold, this pin transitions to a logic low state. |
| 14 | VCC | Supply voltage. |
| 15 | VOC | Overcurrent Input pin. Analog input voltage on this pin sets the overcurrent fault threshold. |
| 16 | FAULT_EN | Enables overcurrent faulting when high. Resets FAULT when low. |

Pin-Out Diagram




Functional Block Diagram Non-Latching Version

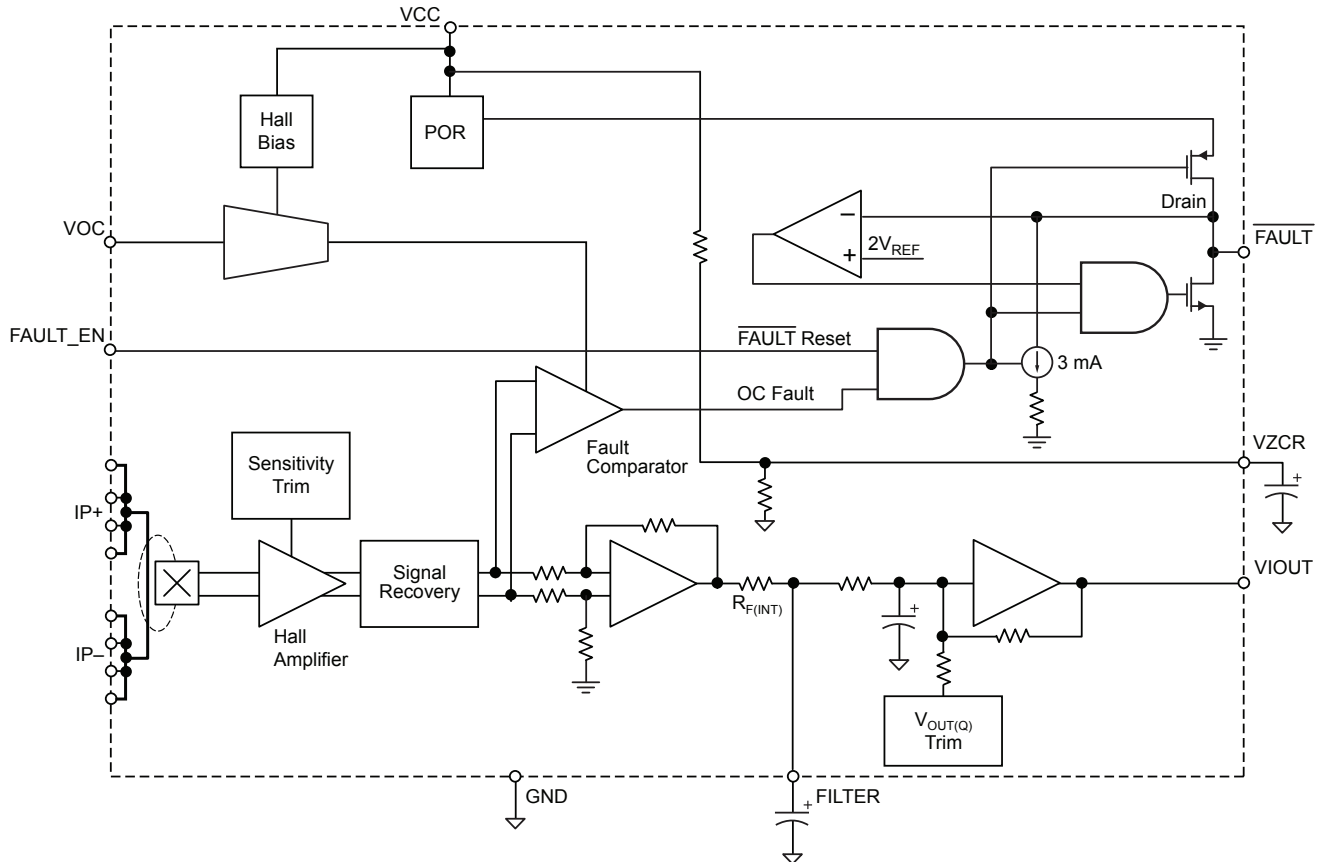

Terminal List Table, Non-Latching Version

| Number | Name | Description |
|---------|----------|---|
| 1,2,3,4 | IP+ | Sensed current copper conduction path pins. Terminals for current being sensed; fused internally, loop to IP- pins; unidirectional or bidirectional current flow. |
| 5,6,7,8 | IP- | Sensed current copper conduction path pins. Terminals for current being sensed; fused internally, loop to IP+ pins; unidirectional or bidirectional current flow. |
| 9 | GND | Device ground connection. |
| 10 | VZCR | Voltage Reference Output pin. Zero current (0 A) reference; output voltage on this pin scales with V _{CC} . (Not a highly accurate reference.) |
| 11 | FILTER | Filter pin. Terminal for an external capacitor connected from this pin to GND to set the device bandwidth. |
| 12 | VIOUT | Analog Output pin. Output voltage on this pin is proportional to current flowing through the loop between the IP+ pins and IP- pins. |
| 13 | FAULT | Overcurrent Fault pin. When current flowing between IP+ pins and IP- pins exceeds the overcurrent fault threshold, this pin transitions to a logic low state. |
| 14 | VCC | Supply voltage. |
| 15 | VOC | Overcurrent Input pin. Analog input voltage on this pin sets the overcurrent fault threshold. |
| 16 | FAULT_EN | Enables overcurrent faulting when high. |

Pin-Out Diagram



COMMON OPERATING CHARACTERISTICS: Valid at $T_A = -40^\circ\text{C}$ to 125°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

| Characteristic | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--|-------------------------------|---|----------------------|---------------------|---------------------|---------------|
| ELECTRICAL CHARACTERISTICS | | | | | | |
| Supply Voltage ¹ | V_{CC} | | 3 | – | 5.5 | V |
| Nominal Supply Voltage | V_{CCN} | | – | 5 | – | V |
| Supply Current | I_{CC} | V _{IOUT} open, $\overline{\text{FAULT}}$ pin high | – | 11 | 14.5 | mA |
| Output Capacitance Load | C_{LOAD} | V _{IOUT} pin to GND | – | – | 10 | nF |
| Output Resistive Load | R_{LOAD} | V _{IOUT} pin to GND | 10 | – | – | k Ω |
| Magnetic Coupling from Device Conductor to Hall Element | MC_{HALL} | Current flowing from IP+ to IP– pins | – | 9.5 | – | G/A |
| Internal Filter Resistance ² | $R_{F(INT)}$ | | – | 1.7 | – | k Ω |
| Primary Conductor Resistance | $R_{PRIMARY}$ | $T_A = 25^\circ\text{C}$ | – | 1 | – | m Ω |
| ANALOG OUTPUT SIGNAL CHARACTERISTICS | | | | | | |
| Full Range Linearity ³ | E_{LIN} | $I_P = \pm I_{P0A}$ | –0.75 | ± 0.25 | 0.75 | % |
| Symmetry ⁴ | E_{SYM} | $I_P = \pm I_{P0A}$ | 99.1 | 100 | 100.9 | % |
| Bidirectional Quiescent Output | $V_{OUT(QBI)}$ | $I_P = 0\text{ A}$, $T_A = 25^\circ\text{C}$ | – | $V_{CC} \times 0.5$ | – | V |
| TIMING PERFORMANCE CHARACTERISTICS | | | | | | |
| V _{IOUT} Signal Rise Time | t_r | $T_A = 25^\circ\text{C}$, Swing I_P from 0 A to I_{P0A} , no capacitor on FILTER pin, 100 pF from V _{IOUT} to GND | – | 3 | – | μs |
| V _{IOUT} Signal Propagation Time | t_{PROP} | $T_A = 25^\circ\text{C}$, no capacitor on FILTER pin, 100 pF from V _{IOUT} to GND | – | 1 | – | μs |
| V _{IOUT} Signal Response Time | $t_{RESPONSE}$ | $T_A = 25^\circ\text{C}$, Swing I_P from 0 A to I_{P0A} , no capacitor on FILTER pin, 100 pF from V _{IOUT} to GND | – | 4 | – | μs |
| V _{IOUT} Large Signal Bandwidth | f_{3dB} | –3 dB, Apply I_P such that $V_{IOUT} = 1\text{ V}_{pk-pk}$, no capacitor on FILTER pin, 100 pF from V _{IOUT} to GND | – | 120 | – | kHz |
| Power-On Time | t_{PO} | Output reaches 90% of steady-state level, no capacitor on FILTER pin, $T_A = 25^\circ\text{C}$ | – | 35 | – | μs |
| OVERCURRENT CHARACTERISTICS | | | | | | |
| Setting Voltage for Overcurrent Switchpoint ⁵ | V_{OC} | | $V_{CC} \times 0.25$ | – | $V_{CC} \times 0.4$ | V |
| Signal Noise at Overcurrent Comparator Input | I_{NCOMP} | | – | ± 1 | – | A |
| Overcurrent Fault Switchpoint Error ^{6,7} | E_{OC} | Switchpoint in V_{OC} safe operating area; assumes $I_{NCOMP} = 0\text{ A}$ | – | ± 5 | – | % |
| Overcurrent $\overline{\text{FAULT}}$ Pin Output Voltage | $V_{\overline{\text{FAULT}}}$ | 1 mA sink current at $\overline{\text{FAULT}}$ pin | – | – | 0.4 | V |
| Fault Enable (FAULT_EN Pin) Input Low Voltage Threshold | V_{IL} | | – | – | $0.1 \times V_{CC}$ | V |
| Fault Enable (FAULT_EN Pin) Input High Voltage Threshold | V_{IH} | | $0.8 \times V_{CC}$ | – | – | V |
| Fault Enable (FAULT_EN Pin) Input Resistance | R_{FEI} | | – | 1 | – | M Ω |

Continued on the next page...

COMMON OPERATING CHARACTERISTICS (continued): Valid at $T_A = -40^\circ\text{C}$ to 125°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

| Characteristic | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--|------------------|---|----------------------|---------------------|----------------------|---------------|
| OVERCURRENT CHARACTERISTICS (continued) | | | | | | |
| Fault Enable (FAULT_EN Pin) Delay ⁸ | t_{FED} | Set FAULT_EN to low, $V_{OC} = 0.25 \times V_{CC}$, $C_{OC} = 0\text{ F}$; then run a DC I_P exceeding the corresponding overcurrent threshold; then reset FAULT_EN from low to high and measure the delay from the rising edge of FAULT_EN to the falling edge of FAULT | – | 15 | – | μs |
| Fault Enable (FAULT_EN Pin) Delay (Non-Latching versions) ⁹ | $t_{FED(NL)}$ | Set FAULT_EN to low, $V_{OC} = 0.25 \times V_{CC}$, $C_{OC} = 0\text{ F}$; then run a DC I_P exceeding the corresponding overcurrent threshold; then reset FAULT_EN from low to high and measure the delay from the rising edge of FAULT_EN to the falling edge of FAULT | – | 150 | – | ns |
| Overcurrent Fault Response Time | t_{OC} | FAULT_EN set to high for a minimum of 20 μs before the overcurrent event; switchpoint set at $V_{OC} = 0.25 \times V_{CC}$; delay from I_P exceeding overcurrent fault threshold to $V_{FAULT} < 0.4\text{ V}$, without external C_{OC} capacitor | – | 1.9 | – | μs |
| Undercurrent Fault Response Time (Non-Latching versions) | t_{UC} | FAULT_EN set to high for a minimum of 20 μs before the undercurrent event; switchpoint set at $V_{OC} = 0.25 \times V_{CC}$; delay from I_P falling below the overcurrent fault threshold to $V_{FAULT} > 0.8 \times V_{CC}$, without external C_{OC} capacitor, $R_{PU} = 330\text{ k}\Omega$ | – | 3 | – | μs |
| Overcurrent Fault Reset Delay | t_{OCR} | Time from $V_{FAULTEN} < V_{IL}$ to $V_{FAULT} > 0.8 \times V_{CC}$, $R_{PU} = 330\text{ k}\Omega$ | – | 500 | – | ns |
| Overcurrent Fault Reset Hold Time | t_{OCH} | Time from $V_{FAULTEN} < V_{IL}$ to rising edge of V_{FAULT} | – | 250 | – | ns |
| Overcurrent Input Pin Resistance | R_{OC} | $T_A = 25^\circ\text{C}$, VOC pin to GND | 2 | – | – | M Ω |
| VOLTAGE REFERENCE CHARACTERISTICS | | | | | | |
| Voltage Reference Output | V_{ZCR} | $T_A = 25^\circ\text{C}$ (Not a highly accurate reference) | $0.48 \times V_{CC}$ | $0.5 \times V_{CC}$ | $0.51 \times V_{CC}$ | V |
| Voltage Reference Output Load Current | I_{ZCR} | Source current | 3 | – | – | mA |
| | | Sink current | 50 | – | – | μA |
| Voltage Reference Output Drift | ΔV_{ZCR} | | – | ± 10 | – | mV |

¹ Devices are programmed for maximum accuracy at $V_{CC} = 5\text{ V}$. The device contains ratiometry circuits that accurately alter the 0 A Output Voltage and Sensitivity level of the device in proportion to the applied V_{CC} level. However, as a result of minor nonlinearities in the ratiometry circuit, additional output error will result when V_{CC} varies from the V_{CC} level at which the device was programmed. Customers that plan to operate the device at a V_{CC} level other than the V_{CC} level at which the device was programmed should contact their local Allegro sales representative regarding expected device accuracy levels under these bias conditions.

² $R_{F(INT)}$ forms an RC circuit via the FILTER pin.

³ This parameter can drift by as much as 0.8% over the lifetime of this product.

⁴ This parameter can drift by as much as 1% over the lifetime of this product.

⁵ See page 8 on how to set overcurrent fault switchpoint.

⁶ Switchpoint can be lower at the expense of switchpoint accuracy.

⁷ This error specification does not include the effect of noise. See the I_{NCOMP} specification in order to factor in the additional influence of noise on the fault switchpoint.

⁸ Fault Enable Delay is designed to avoid false tripping of an Overcurrent (OC) fault at power-up. A 15 μs (typical) delay will always be needed, every time FAULT_EN is raised from low to high, before the device is ready for responding to any overcurrent event.

⁹ During power-up, this delay is 15 μs in order to avoid false tripping of an Overcurrent (OC) fault.

PERFORMANCE CHARACTERISTICS: T_A Range K, valid at T_A = -40°C to 125°C, V_{CC} = 5 V, unless otherwise specified

| Characteristic | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
|--|-------------------------|--|-------|------|------|-------|
| X6BB CHARACTERISTICS | | | | | | |
| Optimized Accuracy Range ¹ | I _{POA} | | -7.5 | - | 7.5 | A |
| Linear Sensing Range | I _R | | -14 | - | 14 | A |
| Noise ² | V _{NOISE(rms)} | T _A = 25°C, Sens = 100 mV/A, C _f = 0, C _{LOAD} = 4.7 nF, R _{LOAD} open | - | 4.05 | - | mV |
| Sensitivity ³ | Sens | I _P = 6.5 A, T _A = 25°C | - | 151 | - | mV/A |
| | | I _P = 6.5 A, T _A = 25°C to 125°C | - | 151 | - | mV/A |
| | | I _P = 6.5 A, T _A = -40°C to 25°C | - | 152 | - | mV/A |
| Electrical Offset Voltage Variation Relative to V _{OUT(QBI)} ⁴ | V _{OE} | I _P = 0 A, T _A = 25°C | - | ±10 | - | mV |
| | | I _P = 0 A, T _A = 25°C to 125°C | - | ±11 | - | mV |
| | | I _P = 0 A, T _A = -40°C to 25°C | - | ±40 | - | mV |
| Total Output Error ⁵ | E _{TOT} | Over full scale of I _{POA} , I _P applied for 5 ms, T _A = 25°C to 125°C | - | ±1.6 | - | % |
| | | Over full scale of I _{POA} , I _P applied for 5 ms, T _A = -40°C to 25°C | - | ±5.6 | - | % |
| X10BB CHARACTERISTICS | | | | | | |
| Optimized Accuracy Range ¹ | I _{POA} | | -10 | - | 10 | A |
| Linear Sensing Range | I _R | | -24 | - | 24 | A |
| Noise ² | V _{NOISE(rms)} | T _A = 25°C, Sens = 85 mV/A, C _f = 0, C _{LOAD} = 4.7 nF, R _{LOAD} open | - | 2.3 | - | mV |
| Sensitivity ³ | Sens | I _P = 10 A, T _A = 25°C | - | 85 | - | mV/A |
| | | I _P = 10 A, T _A = 25°C to 125°C | - | 85 | - | mV/A |
| | | I _P = 10 A, T _A = -40°C to 25°C | - | 85 | - | mV/A |
| Electrical Offset Voltage Variation Relative to V _{OUT(QBI)} ⁴ | V _{OE} | I _P = 0 A, T _A = 25°C | - | ±5 | - | mV |
| | | I _P = 0 A, T _A = 25°C to 125°C | - | ±12 | - | mV |
| | | I _P = 0 A, T _A = -40°C to 25°C | - | ±22 | - | mV |
| Total Output Error ⁵ | E _{TOT} | Over full scale of I _{POA} , I _P applied for 5 ms, T _A = 25°C to 125°C | - | ±1.8 | - | % |
| | | Over full scale of I _{POA} , I _P applied for 5 ms, T _A = -40°C to 25°C | - | ±5 | - | % |
| X12CB CHARACTERISTICS | | | | | | |
| Optimized Accuracy Range ¹ | I _{POA} | | -12.5 | - | 12.5 | A |
| Linear Sensing Range | I _R | | -37.5 | - | 37.5 | A |
| Noise ² | V _{NOISE(rms)} | T _A = 25°C, Sens = 56 mV/A, C _f = 0, C _{LOAD} = 4.7 nF, R _{LOAD} open | - | 1.50 | - | mV |
| Sensitivity ³ | Sens | I _P = 12.5 A, T _A = 25°C | - | 56 | - | mV/A |
| | | I _P = 12.5 A, T _A = 25°C to 125°C | - | 56 | - | mV/A |
| | | I _P = 12.5 A, T _A = -40°C to 25°C | - | 57 | - | mV/A |
| Electrical Offset Voltage Variation Relative to V _{OUT(QBI)} ⁴ | V _{OE} | I _P = 0 A, T _A = 25°C | - | ±4 | - | mV |
| | | I _P = 0 A, T _A = 25°C to 125°C | - | ±14 | - | mV |
| | | I _P = 0 A, T _A = -40°C to 25°C | - | ±23 | - | mV |
| Total Output Error ⁵ | E _{TOT} | Over full scale of I _{POA} , I _P applied for 5 ms, T _A = 25°C to 125°C | - | ±2.2 | - | % |
| | | Over full scale of I _{POA} , I _P applied for 5 ms, T _A = -40°C to 25°C | - | ±3.9 | - | % |

Continued on the next page...

PERFORMANCE CHARACTERISTICS (continued): T_A Range K, valid at $T_A = -40^\circ\text{C}$ to 125°C , $V_{CC} = 5\text{ V}$, unless otherwise specified

| X25CB CHARACTERISTICS | | | | | | |
|---|------------------|--|-----|-----------|----|------|
| Optimized Accuracy Range ¹ | I_{POA} | | -25 | - | 25 | A |
| Linear Sensing Range | I_R | | -75 | - | 75 | A |
| Noise ² | $V_{NOISE(rms)}$ | $T_A = 25^\circ\text{C}$, Sens = 28 mV/A, $C_f = 0$, $C_{LOAD} = 4.7\text{ nF}$, R_{LOAD} open | - | 1 | - | mV |
| Sensitivity ³ | Sens | $I_P = 25\text{ A}$, $T_A = 25^\circ\text{C}$ | - | 28 | - | mV/A |
| | | $I_P = 25\text{ A}$, $T_A = 25^\circ\text{C}$ to 125°C | - | 27.9 | - | mV/A |
| | | $I_P = 25\text{ A}$, $T_A = -40^\circ\text{C}$ to 25°C | - | 28.5 | - | mV/A |
| Electrical Offset Voltage Variation Relative to $V_{OUT(QBI)}$ ⁴ | V_{OE} | $I_P = 0\text{ A}$, $T_A = 25^\circ\text{C}$ | - | ± 3 | - | mV |
| | | $I_P = 0\text{ A}$, $T_A = 25^\circ\text{C}$ to 125°C | - | ± 12 | - | mV |
| | | $I_P = 0\text{ A}$, $T_A = -40^\circ\text{C}$ to 25°C | - | ± 18 | - | mV |
| Total Output Error ⁵ | E_{TOT} | Over full scale of I_{POA} , I_P applied for 5 ms, $T_A = 25^\circ\text{C}$ to 125°C | - | ± 2.9 | - | % |
| | | Over full scale of I_{POA} , I_P applied for 5 ms, $T_A = -40^\circ\text{C}$ to 25°C | - | ± 5.2 | - | % |

¹ Although the device is accurate over the entire linear range, the device is programmed for maximum accuracy over the range defined by I_{POA} . The reason for this is that in many applications, such as motor control, the start-up current of the motor is approximately three times higher than the running current.

² V_{pk-pk} noise (6 sigma noise) is equal to $6 \times V_{NOISE(rms)}$. Lower noise levels than this can be achieved by using C_f for applications requiring narrower bandwidth. See Characteristic Performance page for graphs of noise versus C_f and bandwidth versus C_f .


³ This parameter can drift by as much as 2.4% over the lifetime of this product.

⁴ This parameter can drift by as much as 13 mV over the lifetime of this product.





⁵ This parameter can drift by as much as 2.5% over the lifetime of this product.

Characteristic Performance

ACS710 Bandwidth versus External Capacitor Value, C_F
Capacitor connected between FILTER pin and GND

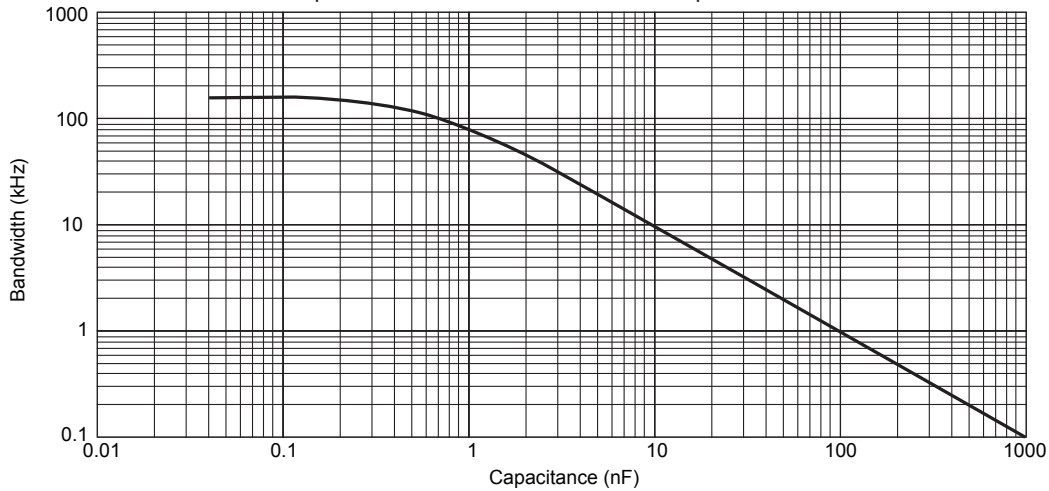

ACS710 Noise versus External Capacitor Value, C_F
Capacitor connected between FILTER pin and GND

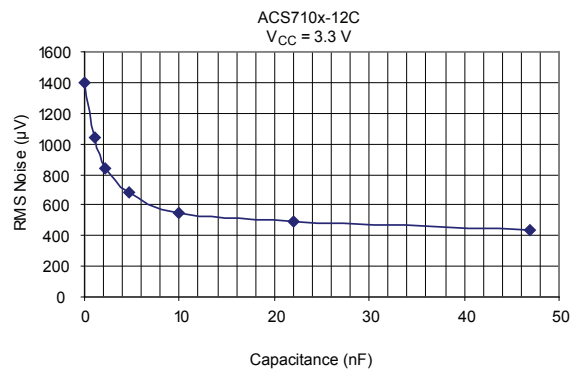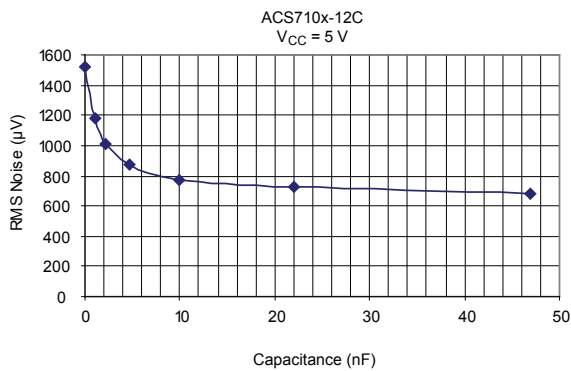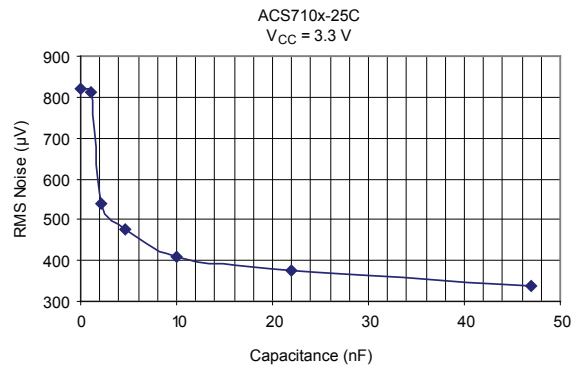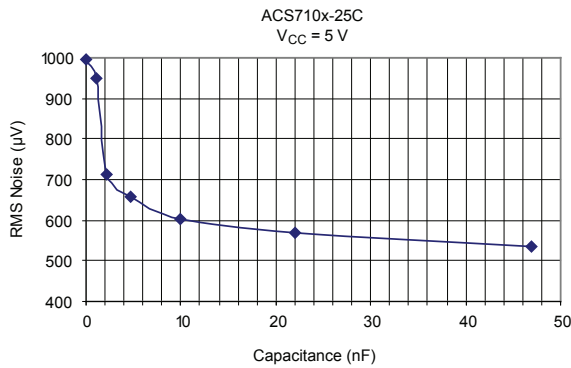


Characteristic Performance Data


Data taken using the ACS710-6BB

Accuracy Data


Electrical Offset Voltage versus Ambient Temperature

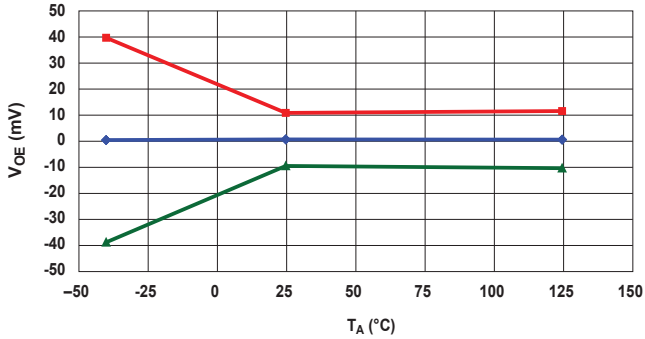


Sensitivity versus Ambient Temperature

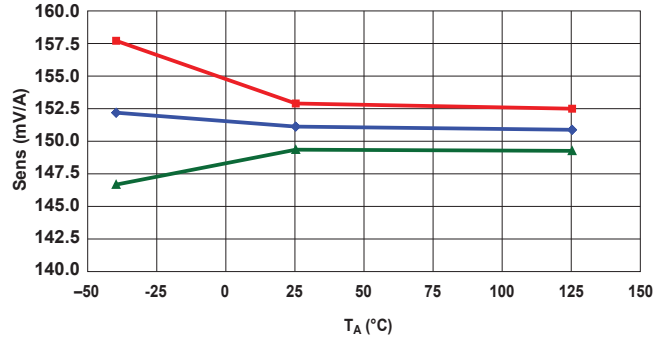



Nonlinearity versus Ambient Temperature

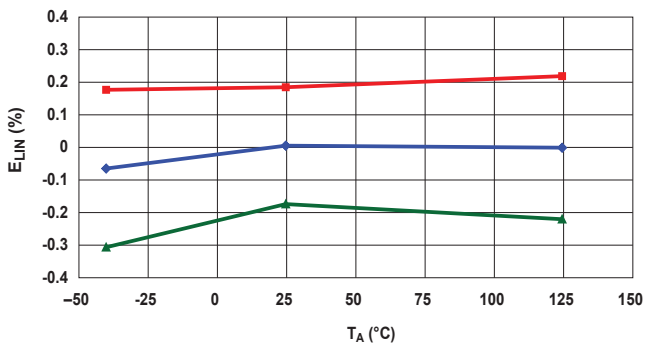

Symmetry versus Ambient Temperature

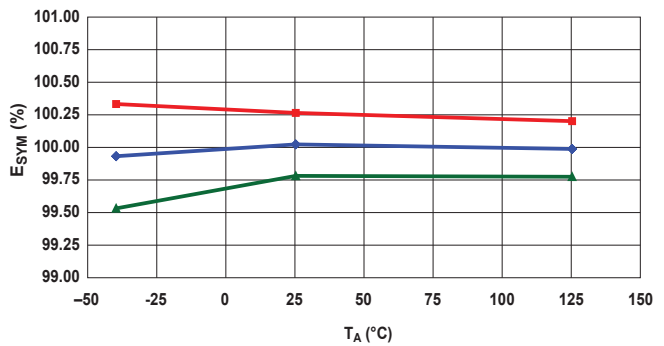

Total Output Error versus Ambient Temperature

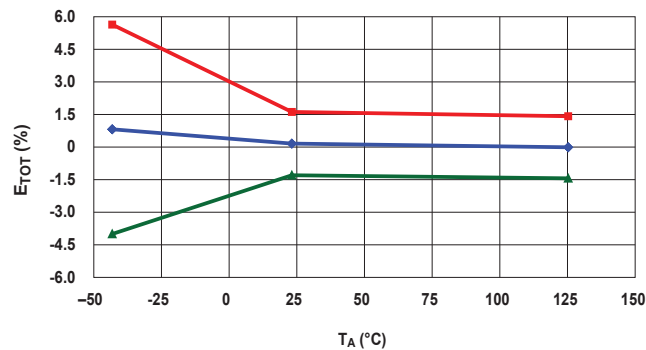


Characteristic Performance Data


Data taken using the ACS710-10BB

Accuracy Data


Electrical Offset Voltage versus Ambient Temperature

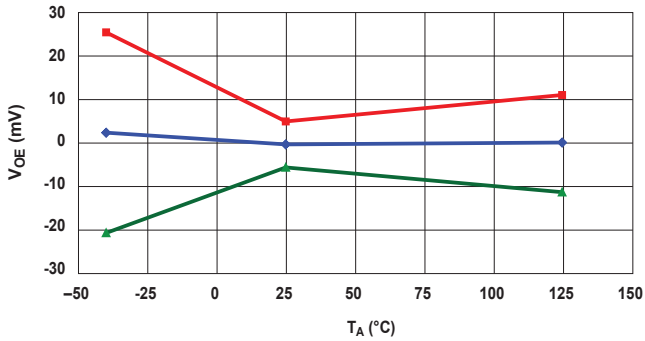


Sensitivity versus Ambient Temperature

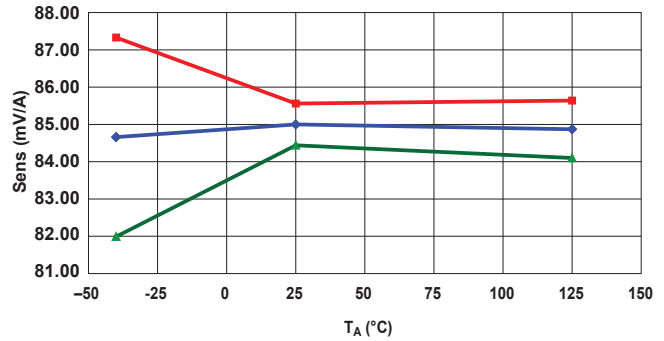



Nonlinearity versus Ambient Temperature

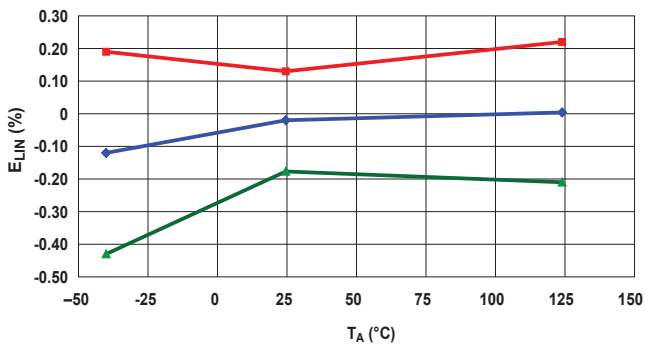

Symmetry versus Ambient Temperature

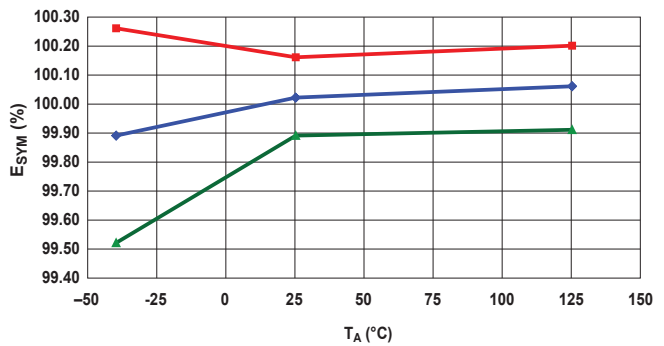

Total Output Error versus Ambient Temperature

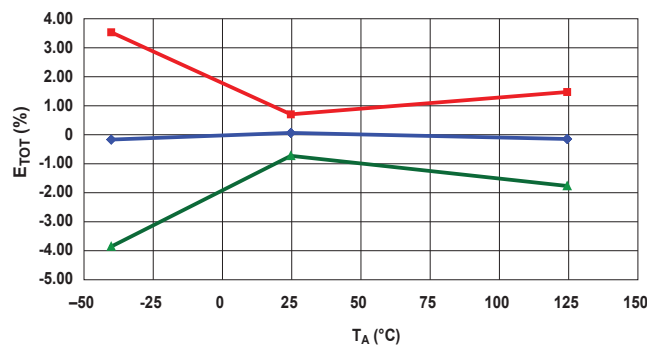


Characteristic Performance Data


Data taken using the ACS710-12CB

Accuracy Data


Electrical Offset Voltage versus Ambient Temperature

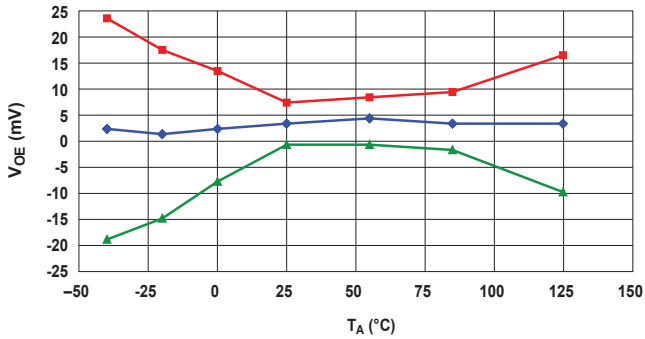


Sensitivity versus Ambient Temperature

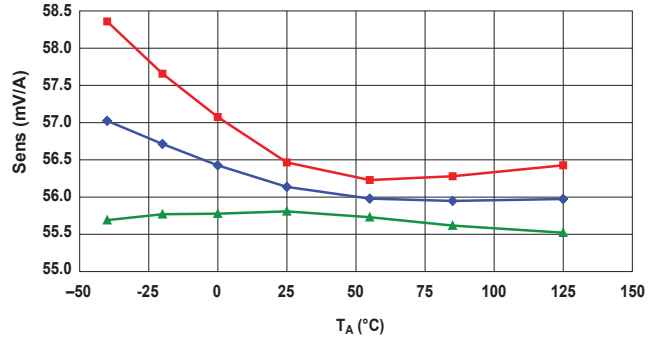



Nonlinearity versus Ambient Temperature

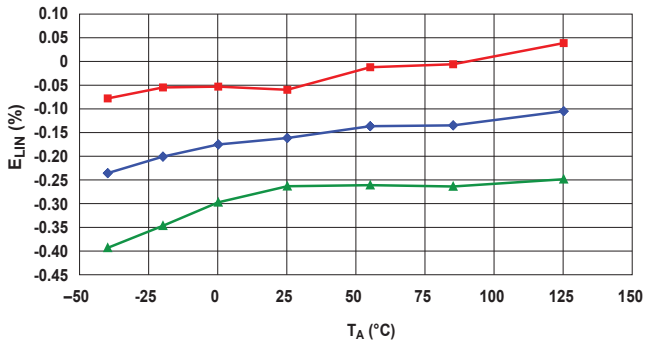

Symmetry versus Ambient Temperature

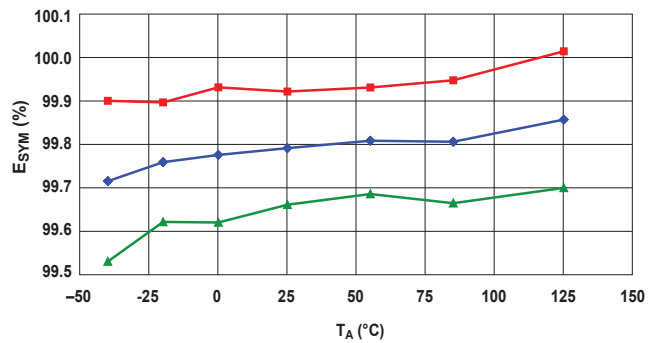

Total Output Error versus Ambient Temperature

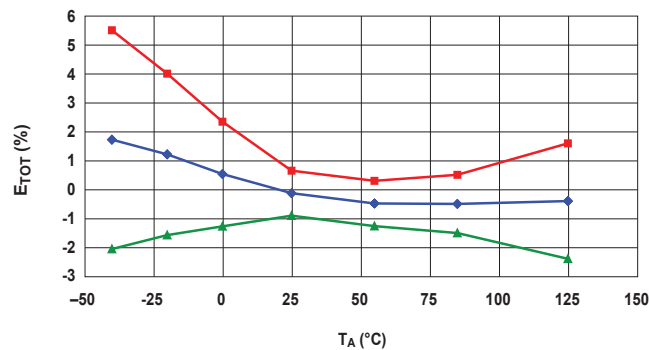


Characteristic Performance Data


Data taken using the ACS710-25CB

Accuracy Data


Electrical Offset Voltage versus Ambient Temperature

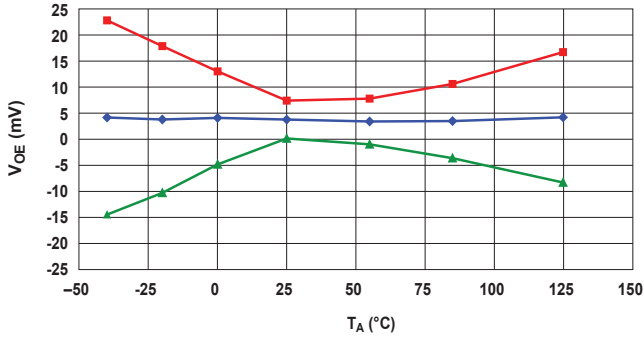


Sensitivity versus Ambient Temperature

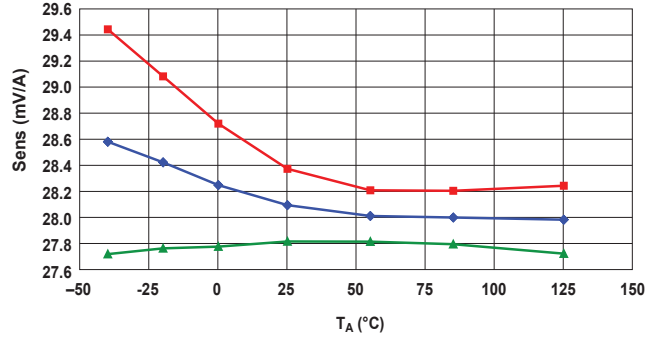



Nonlinearity versus Ambient Temperature

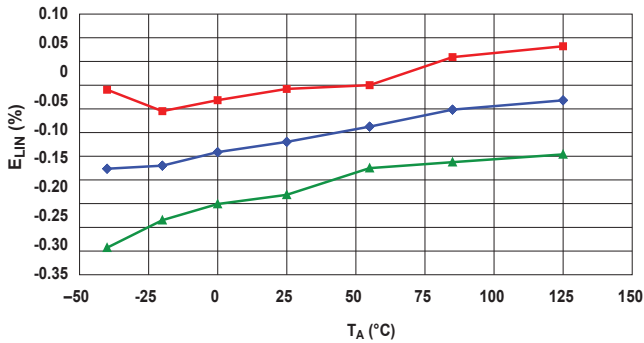

Symmetry versus Ambient Temperature

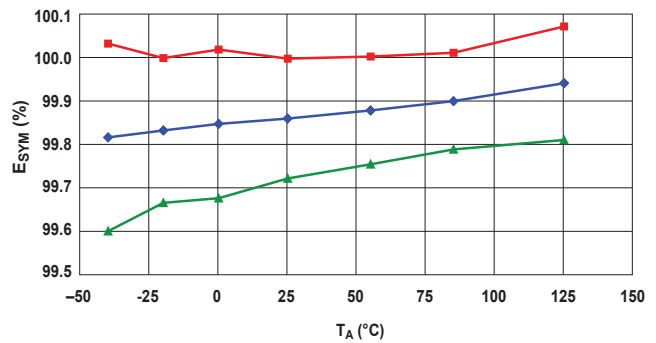

Total Output Error versus Ambient Temperature

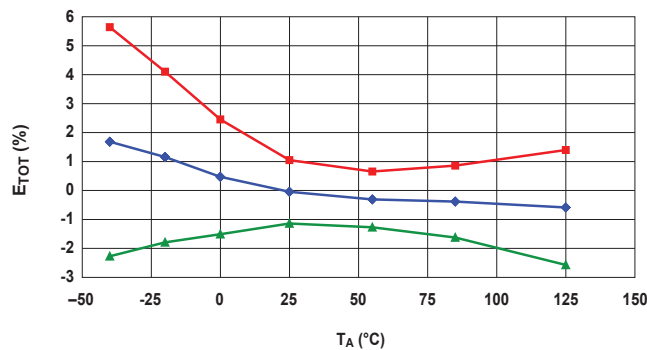

Setting Overcurrent Fault Switchpoint

Setting 12CB and 25CB Versions


The V_{OC} needed for setting the overcurrent fault switchpoint can be calculated as follows:

$$V_{OC} = \text{Sens} \times |I_{OC}|,$$

where V_{OC} is in mV, Sens in mV/A, and I_{OC} (overcurrent fault switchpoint) in A.

$|I_{OC}|$ is the overcurrent fault switchpoint for a bidirectional (AC) current, which means a bidirectional sensor will have two symmetrical overcurrent fault switchpoints, $+I_{OC}$ and $-I_{OC}$.

See the following graph for I_{OC} and V_{OC} ranges.

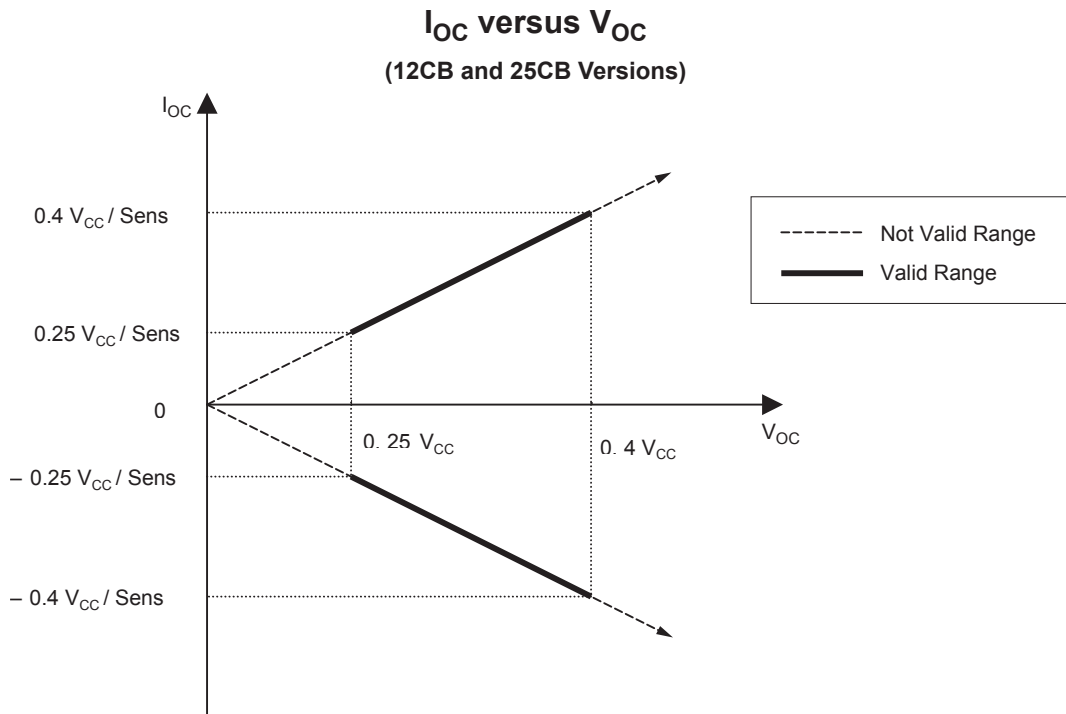

Example: For ACS710KLATR-25CB-T, if required overcurrent fault switchpoint is 50 A, and $V_{CC} = 5$ V, then the required V_{OC} can be calculated as follows:

$$V_{OC} = \text{Sens} \times I_{OC} = 28 \times 50 = 1400 \text{ (mV)}$$

Setting 6BB and 10BB Versions


The V_{OC} needed for setting the overcurrent fault switchpoint can be calculated as follows:

$$V_{OC} = 1.17 \times \text{Sens} \times |I_{OC}| ,$$

where V_{OC} is in mV, Sens in mV/A, and I_{OC} (overcurrent fault switchpoint) in A.

$|I_{OC}|$ is the overcurrent fault switchpoint for a bidirectional (AC) current, which means a bidirectional sensor will have two symmetrical overcurrent fault switchpoints, $+I_{OC}$ and $-I_{OC}$.

See the following graph for I_{OC} and V_{OC} ranges.

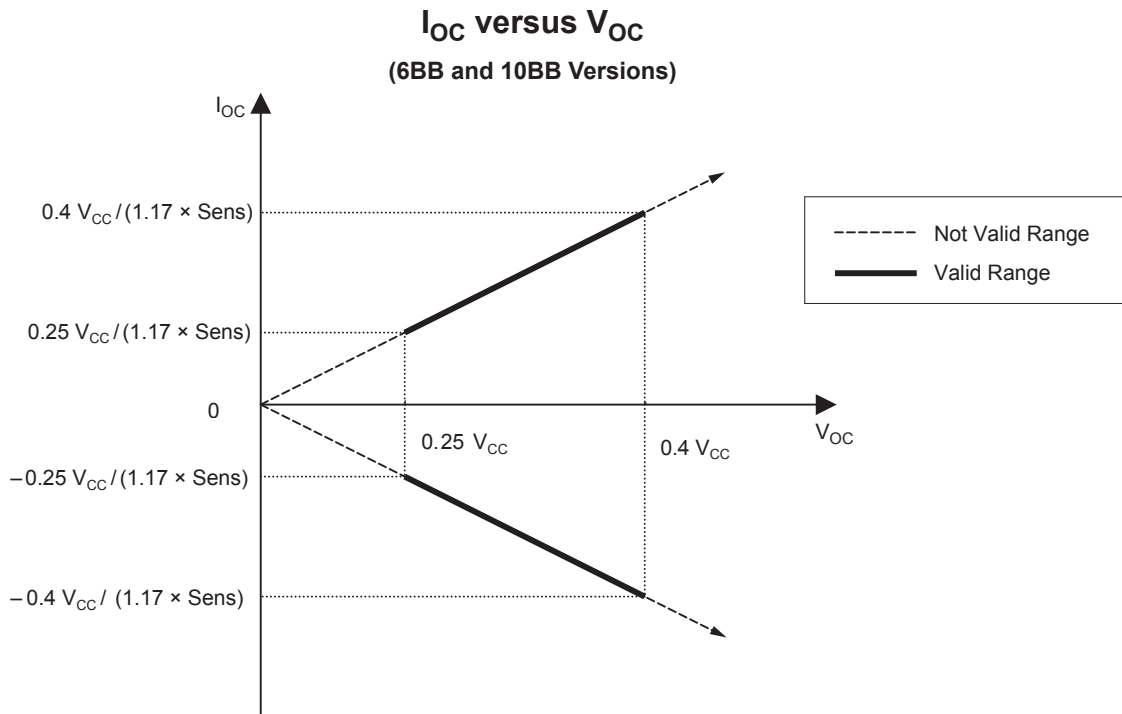

Example: For ACS710KLATR-6BB-T, if required overcurrent fault switchpoint is 10 A, and $V_{CC} = 5$ V, then the required V_{OC} can be calculated as follows:

$$V_{OC} = 1.17 \times \text{Sens} \times I_{OC} = 1.17 \times 151 \times 10 = 1767 \text{ (mV)}$$

Functional Description (Latching Versions)

Overcurrent Fault Operation

The primary concern with high-speed fault detection is that noise may cause false tripping. Various applications have or need to be able to ignore certain faults that are due to switching noise or other parasitic phenomena, which are application dependant. The problem with simply trying to filter out this noise in the main signal path is that in high-speed applications, with asymmetric noise, the act of filtering introduces an error into the measurement. To get around this issue, and allow the user to prevent the fault signal from being latched by noise, a circuit was designed to slew the $\overline{\text{FAULT}}$ pin voltage based on the value of the capacitor from that pin to ground. Once the voltage on the pin falls below 2 V, as established by an internal reference, the fault output is latched and pulled to ground quickly with an internal N-channel MOSFET.

Fault Walkthrough

The following walkthrough references various sections and attributes in the figure below. This figure shows different fault set/reset scenarios and how they relate to the voltages on the $\overline{\text{FAULT}}$ pin, FAULT_EN pin, and the internal Overcurrent (OC) Fault node, which is invisible to the customer.

1. Because the device is enabled (FAULT_EN is high for a minimum period of time, the Fault Enable Delay, t_{FED} , 15 μs typical) and there is an OC fault condition, the device $\overline{\text{FAULT}}$ pin starts discharging.
2. When the $\overline{\text{FAULT}}$ pin voltage reaches approximately 2 V, the fault is latched, and an internal NMOS device pulls the $\overline{\text{FAULT}}$ pin voltage to approximately 0 V. The rate at which the $\overline{\text{FAULT}}$ pin slews downward (see [4] in the figure) is dependent on the external capacitor, C_{OC} , on the $\overline{\text{FAULT}}$ pin.
3. When the FAULT_EN pin is brought low, the $\overline{\text{FAULT}}$ pin starts resetting if no OC fault condition exists, and if FAULT_EN is low for a time period greater than t_{OCH} . The


internal NMOS pull-down turns off and an internal PMOS pull-up turns on (see [7] if the OC fault condition still exists).

4. The slope, and thus the delay to latch the fault is controlled by the capacitor, C_{OC} , placed on the $\overline{\text{FAULT}}$ pin to ground. During this portion of the fault (when the $\overline{\text{FAULT}}$ pin is between V_{CC} and 2 V), there is a 3 mA constant current sink, which discharges C_{OC} . The length of the fault delay, t , is equal to:

$$t = \frac{C_{\text{OC}} \times (V_{\text{CC}} - 2 \text{ V})}{3 \text{ mA}} \quad (1)$$

where V_{CC} is the device power supply voltage in volts, t is in seconds and C_{OC} is in Farads. This formula is valid for R_{PU} equal to or greater than 330 k Ω . For lower-value resistors, the current flowing through the R_{PU} resistor during a fault event, I_{PU} , will be larger. Therefore, the current discharging the capacitor would be $3 \text{ mA} - I_{\text{PU}}$ and equation 1 may not be valid.

5. The $\overline{\text{FAULT}}$ pin did not reach the 2 V latch point before the OC fault condition cleared. Because of this, the fixed 3 mA current sink turns off, and the internal PMOS pull-up turns on to recharge C_{OC} through the $\overline{\text{FAULT}}$ pin.
6. This curve shows V_{CC} charging external capacitor C_{OC} through the internal PMOS pull-up. The slope is determined by C_{OC} .
7. When the FAULT_EN pin is brought low, if the fault condition still exists, the latched $\overline{\text{FAULT}}$ pin will be pulled low by the internal 3mA current source. When fault condition is removed then the Fault pin charges as shown in step 6.
8. At this point there is a fault condition, and the part is enabled before the $\overline{\text{FAULT}}$ pin can charge to V_{CC} . This shortens the user-set delay, so the fault is latched earlier. The new delay time can be calculated by equation 1, after substituting the voltage seen on the $\overline{\text{FAULT}}$ pin for V_{CC} .

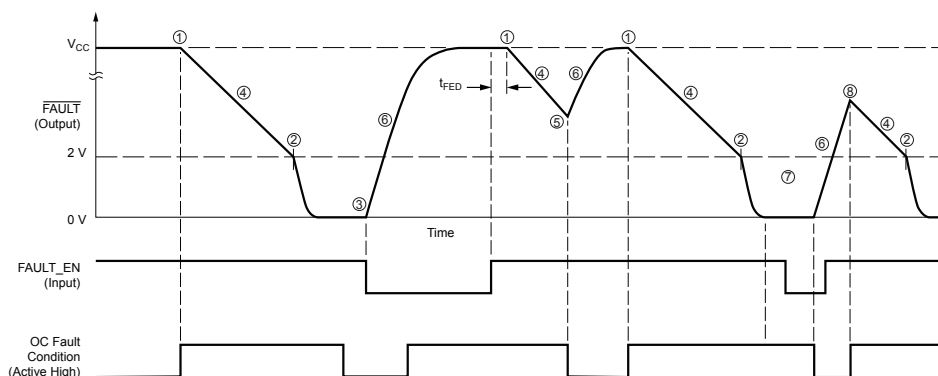

Functional Description (Non-Latching Versions)

Overcurrent Fault Operation

The primary concern with high-speed fault detection is that noise may cause false tripping. Various applications have or need to be able to ignore certain faults that are due to switching noise or other parasitic phenomena, which are application dependant. The problem with simply trying to filter out this noise in the main signal path is that in high-speed applications, with asymmetric noise, the act of filtering introduces an error into the measurement.

To get around this issue, and allow the user to prevent the fault signal from going low due to noise, a circuit was designed to slew the $\overline{\text{FAULT}}$ pin voltage based on the value of the capacitor from that pin to ground. Once the voltage on the pin falls below 2 V, as established by an internal reference, the fault output is pulled to ground quickly with an internal N-channel MOSFET.

Fault Walkthrough

The following walkthrough references various sections and attributes in the figure below. This figure shows different fault set/reset scenarios and how they relate to the voltages on the $\overline{\text{FAULT}}$ pin, FAULT_EN pin, and the internal Overcurrent (OC) Fault node, which is invisible to the customer.

1. Because the device is enabled (FAULT_EN is high for a minimum period of time, the Fault Enable Delay, t_{FED} , and there is an OC fault condition, the device $\overline{\text{FAULT}}$ pin starts discharging.
2. When the $\overline{\text{FAULT}}$ pin voltage reaches approximately 2 V, an internal NMOS device pulls the $\overline{\text{FAULT}}$ pin voltage to approximately 0 V. The rate at which the $\overline{\text{FAULT}}$ pin slews downward (see [4] in the figure) is dependent on the external capacitor, C_{OC} , on the $\overline{\text{FAULT}}$ pin.
3. When the FAULT_EN pin is brought low, the $\overline{\text{FAULT}}$ pin starts resetting if FAULT_EN is low for a time period greater


than t_{OCH} . The internal NMOS pull-down turns off and an internal PMOS pull-up turns on.

4. The slope, and thus the delay to pull the fault low is controlled by the capacitor, C_{OC} , placed on the $\overline{\text{FAULT}}$ pin to ground. During this portion of the fault (when the $\overline{\text{FAULT}}$ pin is between V_{CC} and 2 V), there is a 3 mA constant current sink, which discharges C_{OC} . The length of the fault delay, t , is equal to:

$$t = \frac{C_{\text{OC}} \times (V_{\text{CC}} - 2 \text{ V})}{3 \text{ mA}} \quad (2)$$

where V_{CC} is the device power supply voltage in volts, t is in seconds and C_{OC} is in Farads. This formula is valid for R_{PU} equal to or greater than 330 k Ω . For lower-value resistors, the current flowing through the R_{PU} resistor during a fault event, I_{PU} , will be larger. Therefore, the current discharging the capacitor would be $3 \text{ mA} - I_{\text{PU}}$ and equation 1 may not be valid.

5. The $\overline{\text{FAULT}}$ pin did not reach the 2 V latch point before the OC fault condition cleared. Because of this, the fixed 3 mA current sink turns off, and the internal PMOS pull-up turns on to recharge C_{OC} through the $\overline{\text{FAULT}}$ pin.
6. This curve shows V_{CC} charging external capacitor C_{OC} through the internal PMOS pull-up. The slope is determined by C_{OC} .
7. At this point there is a fault condition, and the part is enabled before the $\overline{\text{FAULT}}$ pin can charge to V_{CC} . This shortens the user-set delay, so the fault gets pulled low earlier. The new delay time can be calculated by equation 1, after substituting the voltage seen on the $\overline{\text{FAULT}}$ pin for V_{CC} .

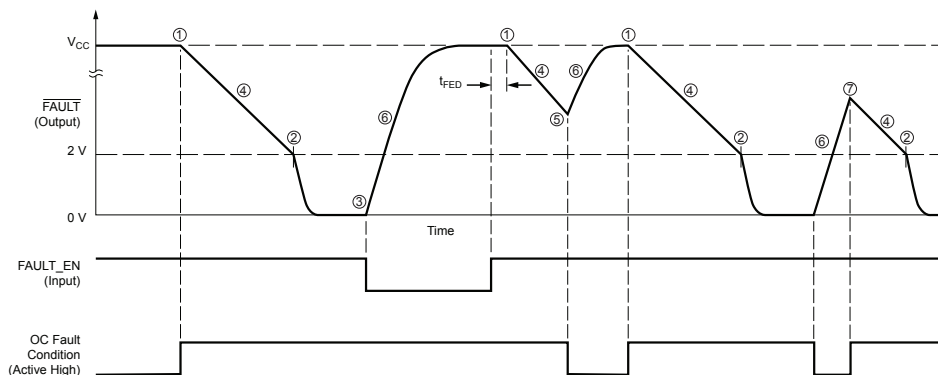


Chopper Stabilization Technique

Chopper stabilization is an innovative circuit technique that is used to minimize the offset voltage of a Hall element and an associated on-chip amplifier. Allegro patented a chopper stabilization technique that nearly eliminates Hall IC output drift induced by temperature or package stress effects. This offset reduction technique is based on a signal modulation-demodulation process. Modulation is used to separate the undesired DC offset signal from the magnetically induced signal in the frequency domain. Then, using a low-pass filter, the modulated DC offset is suppressed while the magnetically induced signal passes through the filter. As a result of this chopper stabilization approach, the

output voltage from the Hall IC is desensitized to the effects of temperature and mechanical stress. This technique produces devices that have an extremely stable electrical offset voltage, are immune to thermal stress, and have precise recoverability after temperature cycling.

This technique is made possible through the use of a BiCMOS process that allows the use of low-offset and low-noise amplifiers in combination with high-density logic integration and sample-and-hold circuits.

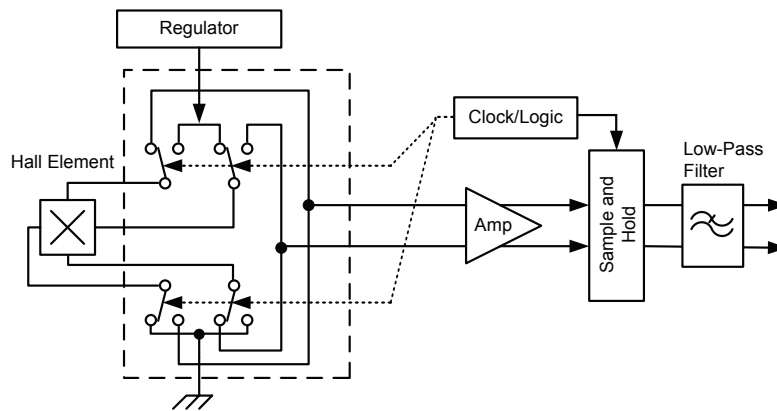

Concept of Chopper Stabilization Technique

Definitions of Accuracy Characteristics

Sensitivity (Sens). The change in sensor output in response to a 1 A change through the primary conductor. The sensitivity is the product of the magnetic circuit sensitivity (G/A) and the linear IC amplifier gain (mV/G). The linear IC amplifier gain is programmed at the factory to optimize the sensitivity (mV/A) for the full-scale current of the device.

Noise (V_{NOISE}). The product of the linear IC amplifier gain (mV/G) and the noise floor for the Allegro Hall-effect linear IC. The noise floor is derived from the thermal and shot noise observed in Hall elements. Dividing the noise (mV) by the sensitivity (mV/A) provides the smallest current that the device is able to resolve.

Linearity (E_{LIN}). The degree to which the voltage output from the sensor varies in direct proportion to the primary current through its full-scale amplitude. Nonlinearity in the output can be attributed to the saturation of the flux concentrator approaching the full-scale current. The following equation is used to derive the linearity:

$$100 \left\{ 1 - \left[\frac{V_{IOUT_full\text{-}scale\text{ amperes}} - V_{IOUT(Q)}}{2 (V_{IOUT_1/2\text{ full-scale amperes}} - V_{IOUT(Q)})} \right] \right\}$$

where $V_{IOUT_full\text{-}scale\text{ amperes}}$ = the output voltage (V) when the sensed current approximates full-scale $\pm I_P$.

Symmetry (E_{SYM}). The degree to which the absolute voltage output from the sensor varies in proportion to either a positive or negative full-scale primary current. The following formula is used to derive symmetry:

$$100 \left(\frac{V_{IOUT_+full\text{-}scale\text{ amperes}} - V_{IOUT(Q)}}{V_{IOUT(Q)} - V_{IOUT_-full\text{-}scale\text{ amperes}}} \right)$$

Quiescent output voltage ($V_{IOUT(Q)}$). The output of the sensor when the primary current is zero. For a unipolar supply voltage, it nominally remains at $0.5 \times V_{CC}$. For example, in the case of a bidirectional output device, $V_{CC} = 5\text{ V}$ translates into $V_{IOUT(Q)} = 2.5\text{ V}$. Variation in $V_{IOUT(Q)}$ can be attributed to the resolution of the Allegro linear IC quiescent voltage trim and thermal drift.

Electrical offset voltage (V_{OE}). The deviation of the device output from its ideal quiescent voltage due to nonmagnetic causes. To convert this voltage to amperes, divide by the device sensitivity, Sens.

Accuracy (E_{TOT}). The accuracy represents the maximum deviation of the actual output from its ideal value. This is also known as the total output error. The accuracy is illustrated graphically in the output voltage versus current chart at right. Note that error is directly measured during final test at Allegro.

Accuracy is divided into four areas:

- **0 A at 25°C.** Accuracy of sensing zero current flow at 25°C, without the effects of temperature.
- **0 A over Δ temperature.** Accuracy of sensing zero current flow including temperature effects.
- **Full-scale current at 25°C.** Accuracy of sensing the full-scale current at 25°C, without the effects of temperature.
- **Full-scale current over Δ temperature.** Accuracy of sensing full-scale current flow including temperature effects.


Ratiometry. The ratiometric feature means that its 0 A output, $V_{IOUT(Q)}$, (nominally equal to $V_{CC}/2$) and sensitivity, Sens, are proportional to its supply voltage, V_{CC} . The following formula is used to derive the ratiometric change in 0 A output voltage, $\Delta V_{IOUT(Q)RAT}$ (%).

$$100 \left(\frac{V_{IOUT(Q)VCC} / V_{IOUT(Q)5V}}{V_{CC} / 5\text{ V}} \right)$$

The ratiometric change in sensitivity, ΔSens_{RAT} (%), is defined as:


$$100 \left(\frac{\text{Sens}_{VCC} / \text{Sens}_{5V}}{V_{CC} / 5\text{ V}} \right)$$

Output Voltage versus Sensed Current
Accuracy at 0 A and at Full-Scale Current

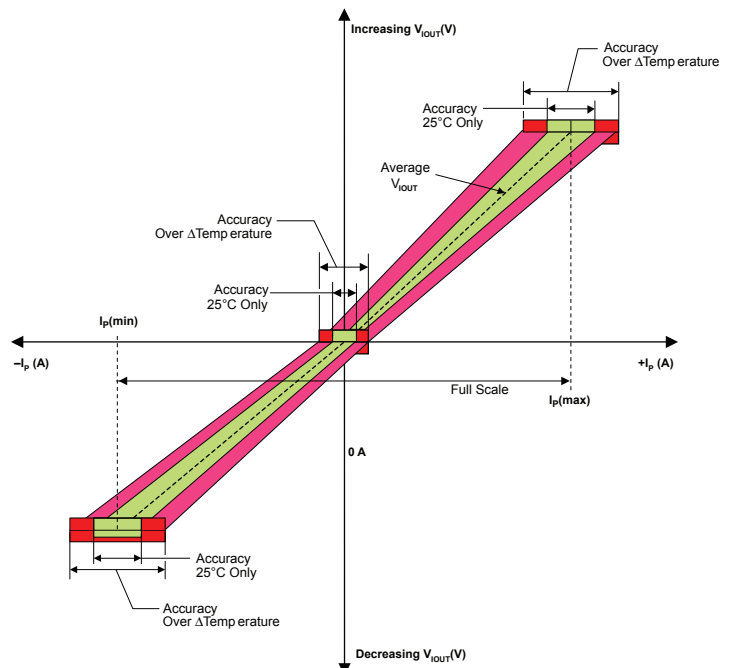


Definitions of Dynamic Response Characteristics


Propagation delay (t_{PROP}). The time required for the sensor output to reflect a change in the primary current signal. Propagation delay is attributed to inductive loading within the linear IC package, as well as in the inductive loop formed by the primary conductor geometry. Propagation delay can be considered as a fixed-time offset and may be compensated.

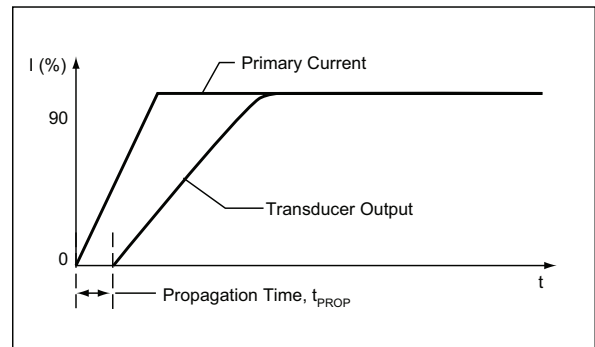


Response time ($t_{RESPONSE}$). The time interval between a) when the primary current signal reaches 90% of its final value, and b) when the sensor reaches 90% of its output corresponding to the applied current.

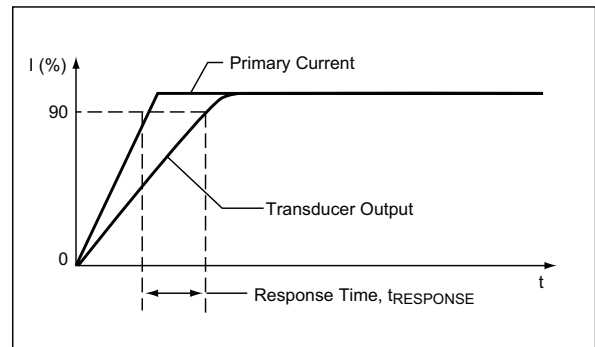

Rise time (t_r). The time interval between a) when the sensor reaches 10% of its full-scale value, and b) when it reaches 90% of its full-scale value. The rise time to a step response is used to derive the bandwidth of the current sensor, in which $f(-3 \text{ dB}) = 0.35/t_r$. Both t_r and $t_{RESPONSE}$ are detrimentally affected by eddy current losses observed in the conductive IC ground plane.

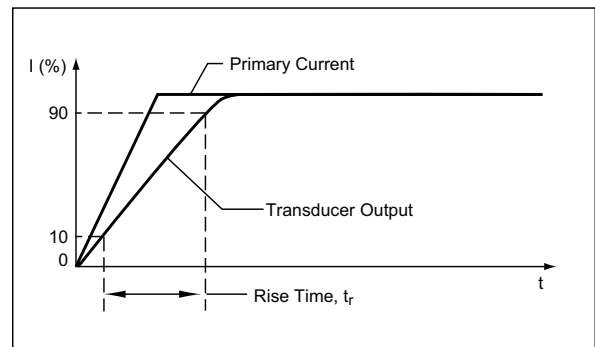

Package LA, 16-Pin SOICW

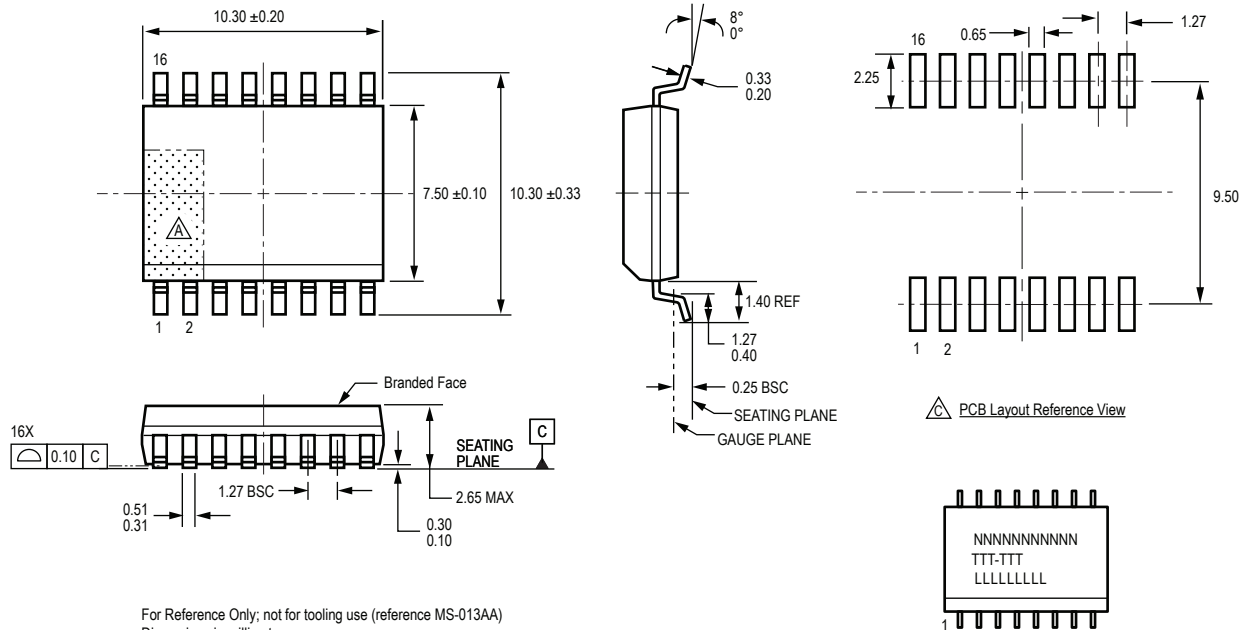

For Reference Only; not for tooling use (reference MS-013AA)
 Dimensions in millimeters
 Dimensions exclusive of mold flash, gate burrs, and dambar protrusions
 Exact case and lead configuration at supplier discretion within limits shown

- Terminal #1 mark area
- Branding scale and appearance at supplier discretion
- Reference land pattern layout (reference IPC7351 SOIC127P600X175-8M); all pads a minimum of 0.20 mm from all adjacent pads; adjust as necessary to meet application process requirements and PCB layout tolerances

Standard Branding Reference View

N = Device part number
 T = Temperature range, package - amperage
 L = Lot number

Revision History

| Revision | Revision Date | Description of Revision |
|-----------------|----------------------|---|
| 9 | June 17, 2013 | Add 10BB variant |
| 10 | August 19, 2015 | Added certificate number under UL stamp on page 1; updated Isolation Characteristics table. |

Copyright ©2007-2015, Allegro MicroSystems, LLC

The products described herein are protected by U.S. patents: 7,166,807; 7,425,821; 7,573,393; and 7,598,601.

Allegro MicroSystems, LLC reserves the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Before placing an order, the user is cautioned to verify that the information being relied upon is current.

Allegro's products are not to be used in life support devices or systems, if a failure of an Allegro product can reasonably be expected to cause the failure of that life support device or system, or to affect the safety or effectiveness of that device or system.

The information included herein is believed to be accurate and reliable. However, Allegro MicroSystems, LLC assumes no responsibility for its use; nor for any infringement of patents or other rights of third parties which may result from its use.

For the latest version of this document, visit our website:

www.allegromicro.com

